




Installation Instructions

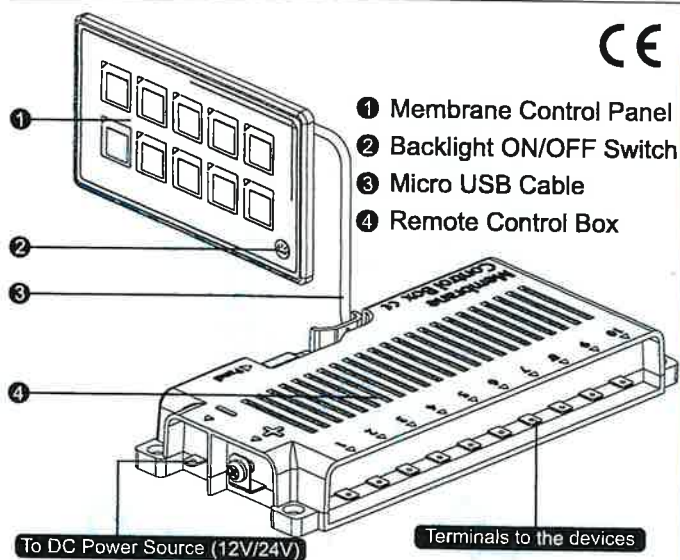

Features


- Ultra Compact panel size (60% smaller than traditional panels)
- Easy to install – no mounting depth, minimum hole drilling
- Flexible wiring – Control Relay Box installed 1m away from the touch panel
- IP67 - Protected even under temporary water immersion (Panel only)
- ON-indication LED / 10A Self-resettable fuse for each branch
- Backlight module allowing easy operation in darkness
- Very low standby current
- Programmable momentary button – all buttons can be programmed to be momentary (ideal for horn or wiper applications)
- 60pcs Assorted Graphic and Text labels stickers set included

Specifications





- Faceplate | PET membrane touch panel
- Circuit Protection | Built-in Resettable Fuse (PPTC)
- Switch Ratings | 10A per branch
- Panel Rating | Max Cumulative Amp: 60A
- Voltage Rating | DC 11 - 30V
- Notes | IP67 (Membrane Panel)
- Power Terminals | M5 stud size Ring terminals
- Load Terminals | .250 Quick Terminals (Male)

Actual Panel Size

This template is provided to help you install the membrane panel correctly. Cut out template and trace onto the dashboard. Then drill a hole at the shielded area.



Cut hole here

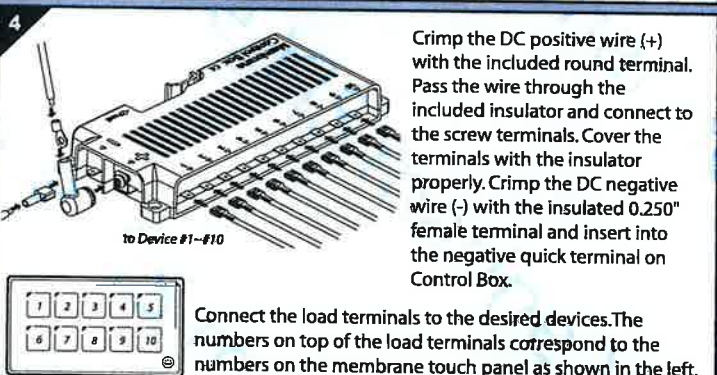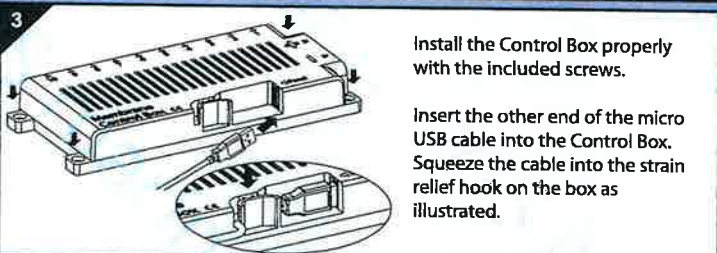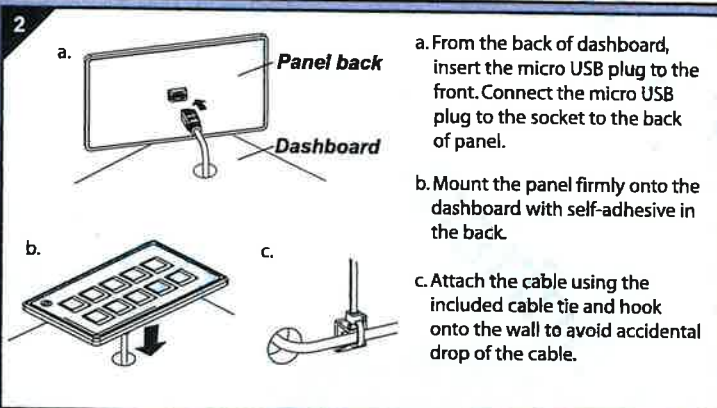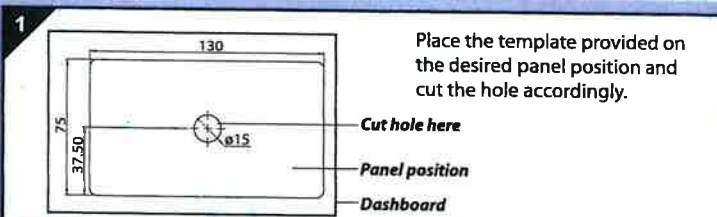

How to Pair

“My CONTROL PANEL”

1

 Download on the
App Store

 GET IT ON
Google Play


 DOWNLOAD APK
android


App Control
Panel




 ON
 ON

2

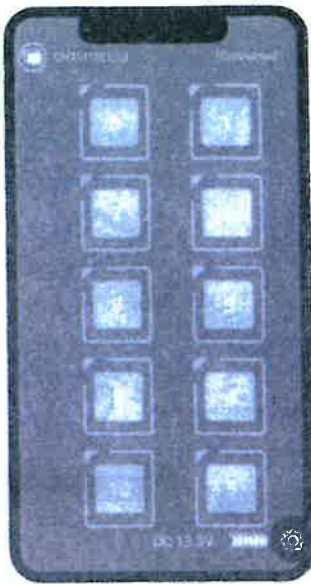

3

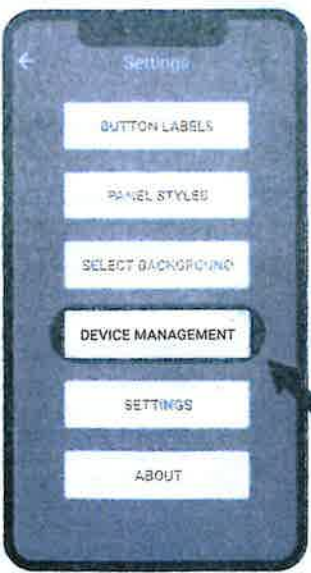

4



Password: 0000



- 1 Buttons #1~#10 (Customizable in Settings)
- 2 Switching between different control boxes
- 3 Current device | Connection Status
- 4 System voltage monitor
- 5 Settings